

# Product Environmental Profile

Smart-UPS<sup>®</sup> Online



PEP ecopassport SCHN-2011-564-V0

**APC**<sup>®</sup>

by **Schneider** Electric

## Product Environmental Profile - PEP

### Product overview

The Smart-UPS® Online product range prevents blackouts, brownouts, sags, and surges from reaching critical electronic equipment. The Smart-UPS® Online product range filters out small utility line fluctuations and isolates your equipment from large disturbances by internally disconnecting from the utility line and supplying continuous power from its internal battery pack until the utility line returns to safe levels. The Smart-UPS® Online product range provides high density, true double-conversion on-line power protection for servers, voice / data networks, medical labs, and light industrial applications.

This range consists of Smart UPS with different form factors (tower and rack) and with a maximum configurable power comprises between 700 Watts / 1000 VA and 16000 Watts / 20000 VA.

The representative product used for the analysis is the SURT1000XLI: APC Smart-UPS On-Line, 700 Watts / 1000 VA, Input 230V / Output 230V , Interface Port DB-9 RS-232, SmartSlot , Extended runtime model , Rack Height 2 U

The environmental impacts of this referenced product are representative of the impacts of the other products of the range which are developed with a similar technology.

The environmental analysis was performed in conformity with ISO 14040.


#### Products

Smart-UPS® RT Rack/Tower – SURT/SURTA/SURTD 1000 VA to 10,000 VA  
Smart-UPS® RT Rack/Tower – DL/DLA/EMC/IBM/NEC/FJ 1000 VA to 10,000 VA

### Constituent materials

The mass of the product range is from 23.7 kg and 63.6 kg including packaging. It is 23.7 kg for the SURT1000XLI.

The constituent materials are distributed as follows:

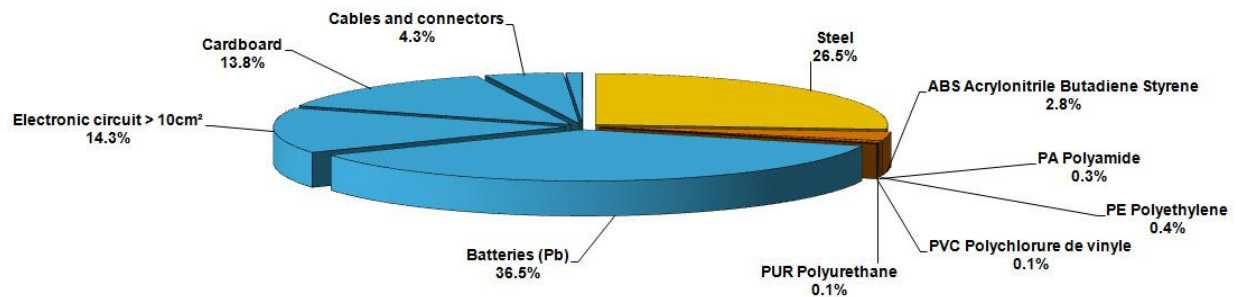

### Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2002/95/EC of 27 January 2003) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive.

The battery pack within this product range are designed in conformity with the requirements of the Battery Directive (European Directive 2006/66/EC of 26 September 2006) and do not contain, or only contain in authorized proportions, lead, mercury and cadmium as mentioned in the Battery Directive.

### Manufacturing

The Smart-UPS® Online product range is manufactured at a Schneider Electric production site on which an ISO14001 certified environmental management system has been established.

### Distribution

The weight and volume of the packaging have been optimized, based on the European Union's packaging directive.

The Smart-UPS® Online packaging weight is 4.128 kg. It consists of cardboard, Polyethylene and paper.

# Product Environmental Profile - PEP

## Use

The products of the Smart UPS® Online range do not generate environmental pollution (emissions) requiring special precautionary measures in standard use. Audible noise one meter from the surface of the product is between 45 and 53 dBA.

The usage scenario for Uninterruptible Power Supplies is specific; the methodology for the calculation of the electricity consumption is based on the Energy Star rules under development by the U.S. Environmental Protection Agency (Energy Star Uninterruptible Power Supply Product Category version 1, draft 2, 14 Oct 2011).

	Weighted Average Load (%)	Weighted Average Loss (%)	Weighted Average Loss (W)	Annual Average Consumption (kWh)	Life time (years)	Lifetime Average Consumption (kWh)
SURTA1500XL – Reference product and Best case	75.0%	9.8%	102.8	901	10	9,007
SURTD5000XLT – Worst case	75.0%	7.1%	247.5	2,168	10	21,683

Maintenance: The replacement of 1 battery pack is required during the service life of the product.

## End of life

At end of life, the products in the Smart-UPS® Online have been optimized to decrease the amount of waste and allow recovery of the product components and materials.

This product range contains batteries, external cables and electronic boards that should be separated from the stream of waste so as to optimize end-of-life treatment by special treatments. The location of these components and other recommendations are given in the End of Life Instruction document which is available for this product range.

The recyclability potential of the products has been evaluated using the "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

According to this method, the potential recyclability ratio is: 55%.

As described in the recyclability calculation method this ratio includes only metals and plastics which have proven industrial recycling processes.

## Environmental impacts

Life cycle assessment has been performed on the following life cycle phases: Materials and Manufacturing (M), Distribution (D), Installation (I) Use (U), and End of life (E).

Modeling hypothesis and method:

- the calculation was performed on the SURT1000XLI
- product packaging: is included
- Installation components: no special components included.
- scenario for the Use phase: this product range is included in the category 2: Energy consuming product. The usage scenario for UPS is specific; the methodology for the calculation of the electricity consumption is based on the rules defined by the EPA for small household UPS.

Assumed service life is 10 years

Use scenario is: annual electricity consumption = 901 kWh per year

The electrical power model used for calculation is the average European model.

This equipment require the replacement of 1 pack of batteries during the life cycle

- End of life impacts are based on a worst case transport distance to the recycling plant (1000km)

### Presentation of the product environmental impacts

Environmental indicators	Unit	SURT1000XLI					
		S = M + D + I + U + E	M	D	I	U	E
Raw Material Depletion	Y-1	3.19E-12	1.98E-12	2.74E-17	0	1.21E-12	5.62E-17
Energy Depletion	MJ	1.06E+05	2.20E+03	2.01E+01	0	1.04E+05	4.12E+01
Water depletion	dm <sup>3</sup>	1.60E+04	8.45E+02	1.91E+00	0	1.52E+04	3.91E+00
Global Warming	g≈CO <sub>2</sub>	5.37E+06	1.28E+05	1.59E+03	0	5.23E+06	3.26E+03
Ozone Depletion	g≈CFC-11	3.15E-01	2.12E-02	1.12E-03	0	2.90E-01	2.31E-03
Air Toxicity	m <sup>3</sup>	9.74E+08	7.01E+07	2.99E+05	0	9.03E+08	6.15E+05
Photochemical Ozone Creation	g≈C <sub>2</sub> H <sub>4</sub>	1.83E+03	5.11E+01	1.36E+00	0	1.77E+03	2.79E+00
Air acidification	g≈H <sup>+</sup>	7.42E+02	2.94E+01	2.03E-01	0	7.12E+02	4.16E-01
Water Toxicity	dm <sup>3</sup>	1.51E+06	2.44E+04	1.99E+02	0	1.49E+06	4.08E+02
Water Eutrophication	g≈PO <sub>4</sub>	2.01E+01	6.95E+00	2.64E-02	0	1.30E+01	5.42E-02
Hazardous waste production	Kg	8.86E+01	1.96E+00	5.91E-04	0	8.66E+01	1.21E-03

Life cycle assessment has been performed with the EIME software (Environmental Impact and Management Explorer), version 4, and with its database version 11.0.

The Manufacturing phase and the use phase are the life cycle phase which has the greatest impact on the majority of environmental indicators.

## Product Environmental Profile - PEP

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range: Depending on the impact analysis, the impact on the Raw Material Depletion of other products in this family may be proportional extrapolated by the mass of the products. The impacts on the other indicators are proportional to the electricity consumption.

## System approach

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.


Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

# Product Environmental Profile - PEP

## Glossary

<b>Raw Material Depletion (RMD)</b>	This indicator quantifies the consumption of raw materials during the life cycle of the product. It is expressed as the fraction of natural resources that disappear each year, with respect to all the annual reserves of the material.
<b>Energy Depletion (ED)</b>	This indicator gives the quantity of energy consumed, whether it be from fossil, hydroelectric, nuclear or other sources. This indicator takes into account the energy from the material produced during combustion. It is expressed in MJ.
<b>Water Depletion (WD)</b>	This indicator calculates the volume of water consumed, including drinking water and water from industrial sources. It is expressed in dm <sup>3</sup> .
<b>Global Warming (GW)</b>	The global warming of the planet is the result of the increase in the greenhouse effect due to the sunlight reflected by the earth's surface being absorbed by certain gases known as "greenhouse-effect" gases. The effect is quantified in gram equivalent of CO <sub>2</sub> .
<b>Ozone Depletion (OD)</b>	This indicator defines the contribution to the phenomenon of the disappearance of the stratospheric ozone layer due to the emission of certain specific gases. The effect is expressed in gram equivalent of CFC-11.
<b>Air Toxicity (AT)</b>	This indicator represents the air toxicity in a human environment. It takes into account the usually accepted concentrations for several gases in the air and the quantity of gas released over the life cycle. The indication given corresponds to the air volume needed to dilute these gases down to acceptable concentrations.
<b>Photochemical Ozone Creation (POC)</b>	This indicator quantifies the contribution to the "smog" phenomenon (the photochemical oxidation of certain gases which generates ozone) and is expressed in gram equivalent of ethylene (C <sub>2</sub> H <sub>4</sub> ).
<b>Air Acidification (AA)</b>	The acid substances present in the atmosphere are carried by rain. A high level of acidity in the rain can cause damage to forests. The contribution of acidification is calculated using the acidification potentials of the substances concerned and is expressed in mode equivalent of H <sup>+</sup> .
<b>Water Toxicity (WT)</b>	This indicator represents the water toxicity. It takes into account the usually accepted concentrations for several substances in water and the quantity of substances released over the life cycle. The indication given corresponds to the water volume needed to dilute these substances down to acceptable concentrations.
<b>Hazardous Waste Production (HWP)</b>	This indicator calculates the quantity of specially treated waste created during all the life cycle phases (manufacturing, distribution and utilization). For example, special industrial waste in the manufacturing phase, waste associated with the production of electrical power, etc. It is expressed in kg.

APC by Schneider Electric has achieved compliance status and the accuracy of data in this PEP document is based on our best knowledge as of the date of its publication.

Registration No.: SCHN-2011-564-V0		Writing rules: PCR PEPEcopassport 2010 :1.0	
Accreditation No. of verifier:: VH05		Programme information: www.pep-ecopassport.org	
Date of issue: 11-2011		Period of validity: 4 years	
Independent verification of the declaration and data, in compliance with ISO 14025:2006			
Internal		External	X
In compliance with the ISO 14025:2006 type III environmental declaration standard.			
The critical review of the PCR was conducted by a panel of experts chaired by. J. Chevalier (CSTB).			
The information in the present PEP cannot be compared with information from another programme.			

For more information please go to: <http://www.apc.com/recycle/>

**Schneider Electric Industries SAS**  
 35, rue Joseph Monier  
 CS 30323  
 F- 92506 Rueil Malmaison Cedex  
 RCS Nanterre 954 503 439  
 Capital social 896 313 776 €  
 www.schneider-electric.com

**APC by Schneider Electric**  
 132 Fairgrounds Road  
 West Kingston, RI 02892  
 Phone 800-788-2208  
 www.APC.com